




GBOY/4143



INVESTOR IN PEOPLE

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

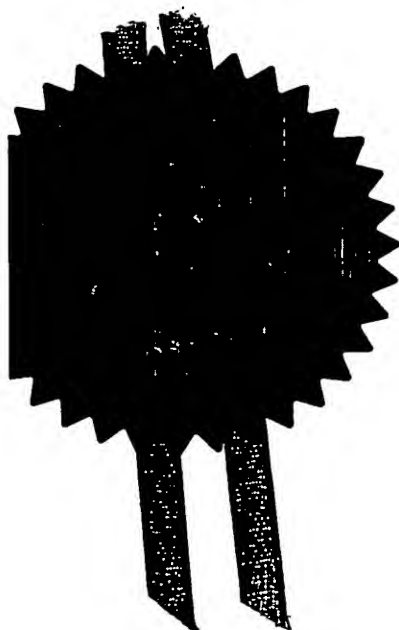

Signed *[Signature]*

Dated 8 October 2004

**BEST AVAILABLE COPY**

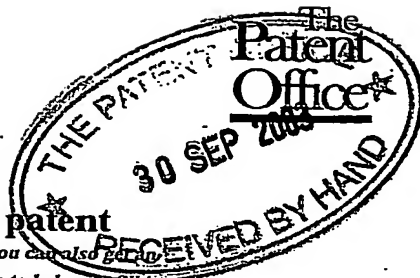

1/77

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales

010CT03 E841061-1 DQ0056 RH  
P01/7700 0.00 0322858.2

1. Your reference **NRJ/P35929GB**

2. Patent application number  
(The Patent Office will fill in this part)

**0322858.2**

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Ricardo UK Limited  
Bridge Works  
Shoreham-by-Sea  
West Sussex  
BN43 5FG  
**8598948001**  
Great Britain

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

**A CARBURETTOR**

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Kilburn & Strode  
20 Red Lion Street  
London  
WC1R 4PJ

Patents ADP number (if you know it)

**125001** ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

**YES**

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 15 ✓

Claim(s) 0

Abstract 0

Drawing(s) 2 + 2 *for L*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(*please specify*)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 30/09/2003

*Kilburn & Stoodle*

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. N R Jennings  
Tel: 020 7539 4200

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.  
b) Write your answers in capital letters using black ink or you may type them.  
c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.  
d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.  
e) Once you have filled in the form you must remember to sign and date it.  
f) For details of the fee and ways to pay please contact the Patent Office.

## A CARBURETTOR

The present invention relates to carburetors of the type disclosed in WO99/58829. Such carburetors are intended for use with two stroke engines  
5 whose inlet duct is divided into two separate passages, referred to as a rich passage and a lean passage. The carburettor is arranged to direct a rich fuel/air mixture into the rich passage and a weak mixture or substantially pure air into the lean passage at high engine load, when the carburettor butterfly valve is substantially fully open, but to direct a substantially equally rich mixture into  
10 both the rich and lean passages at low engine load, when the butterfly valve is substantially closed.

The engine with which the carburettor is used is of the crankcase scavenged type and is arranged so that the combustion space is filled with a stratified  
15 charge, that is to say a charge whose fuel/air ratio varies over the volume of the combustion space, at high engine load but with a substantially homogeneous charge, that is to say a charge whose fuel/air ratio is substantially the same over the volume of the combustion space, at low engine load. This is achieved in the engine disclosed in WO99/58829 by dividing the interior of the crankcase into  
20 two or more separate volumes, one of which, referred to as the rich volume, communicates with the rich passage, and the other of which, referred to as the lean volume, communicates with the lean passage. The rich and lean volumes communicate with the combustion space at different positions.

25 Under high engine load, the combustion space is scavenged primarily with substantially pure air from the lean volume. The remaining pure air and the rich fuel/air mixture from the rich volume do not mix thoroughly and the charge is stratified. Under low load, there is a similar relatively weak fuel/air mixture in both the rich and lean volumes and the charge in the combustion space is  
30 therefore substantially homogeneous.

The carburettor disclosed in WO99/58829 is shown highly schematically here in Figure 1. The carburettor 1 includes a flow duct comprising rich 60 and lean 50 flow passages in parallel, through which, in use, air flows in a flow direction and which are separated by a substantially planar partition 30, at least one fuel jet 5 communicating with the rich passage 60, the partition 30 including an aperture 40 towards which the fuel jet 5 is directed, and a substantially planar butterfly valve 20 being received in the aperture 40 so as to be pivotable between a first position, in which the flow duct is substantially closed and the aperture 40 is substantially open, and a second position, in which the flow duct is substantially open and the aperture 40 is substantially closed, the upstream half of the aperture 40 being defined by an upstream semi-annular seating ledge 48 affording an upstream seating surface which is engaged by one of the surfaces of the butterfly valve 20 when it is in the second position and a first end surface which extends between the upstream seating surface and that surface of the partition 30 which is directed towards the lean passage 50, the downstream half of the aperture 40 being defined by a downstream semi-annular seating ledge 49 affording a downstream seating surface which is engaged by the other surface of the butterfly valve 20 when it is in the second position and a second end surface, which extends between the downstream seating surface and that surface of the partition 30 which is directed towards the rich passage.

When the engine is idling, the butterfly valve 20 substantially blocks the flow passages 50, 60 and opens the aperture 40. Some of the fuel discharged from the jet 5 can flow through the aperture 40 and is therefore carried generally equally by the airflow into the passages 50 and 60.

In high load operation, the butterfly valve 20 does not block the flow passage but instead closes the aperture 40, ensuring that all the fuel sprayed from the

jets 5 flows into the rich passage 60. Substantially pure air flows through the lean passage 50.

5 The problem with this carburettor is that at high load operation, when the butterfly valve 20 closes the aperture 40, some of the fuel exiting the jets 5 tends to leak through the seal created by closure of the aperture 40 by the valve 20, and escapes into the lean passage 50. This leakage results in a higher concentration of fuel being exhausted from the engine during the scavenging process, leading to higher emission levels than is desired.

10

In order to meet emissions legislation, it is highly desirable that fuel in the rich passage 60 does not leak into the lean passage 50. However, to use an additional seal such as a rubber seal would add cost and complexity to the manufacture of the carburettor.

15

It has been identified by the inventor of the present invention that the leakage from the rich passage 60 to the lean passage 50 is due to local pressure gradients across the edges of the valve 20. The internal geometry of the carburettor creates pockets of localised high and low pressure around the valve 20 and the pressure can be locally lower at the valve edge in the lean passage 50 than it is at the valve edge in the rich passage 60. Since gas flows from a high-pressure region to a low-pressure region, the air and fuel in the rich passage 60 tends to seep between the valve 20 and the partition wall 30 into the lean passage 50.

25

The present invention aims to reduce the likelihood of gas seepage from the rich passage into the lean passage in a simple and effective manner by altering the geometry of the carburettor to redress the pressure differentials across the valve edges, creating an air seal between the two passages.

According to a first aspect of the invention, there is provided a carburettor for a two stroke engine including a flow duct comprising rich and lean flow passages in parallel, through which, in use, air flows in a flow direction and which are separated by a substantially planar partition, at least one fuel jet communicating with the rich passage, the partition including an aperture towards which the fuel jet is directed, and a substantially planar butterfly valve being received in the aperture so as to be pivotable between a first position, in which the flow duct is substantially closed and the aperture is substantially open, and a second position, in which the flow duct is substantially open and the aperture is substantially closed, the upstream half of the aperture being defined by an upstream semi-annular seating ledge affording an upstream seating surface which is engaged by one of the surfaces of the butterfly valve when it is in the second position and a first end surface which extends between the upstream seating surface and that surface of the partition which is directed towards the lean passage, the downstream half of the aperture being defined by a downstream semi-annular seating ledge affording a downstream seating surface which is engaged by the other surface of the butterfly valve when it is in the second position and a second end surface, which extends between the downstream seating surface and that surface of the partition which is directed towards the rich passage, characterised in that at least a portion of the downstream seating ledge is of progressively decreasing thickness in the inward direction of the aperture.

This feature may reduce the high pressure in the air flow as it approaches the second end surface of the downstream seating ledge and also reduces the likelihood of flow separation over the downstream seating ledge. The seating ledges are necessary in order to provide stops for the valve as it rotates into the fully closed position. However, the second end surface of the downstream

seating ledge of WO99/58829 creates a blockage in the air flow, causing the approaching air to slow down, locally increasing the pressure there. The flow then stagnates against the second end surface, and flow can separate at the sharp lowermost corner of the seating ledge as shown in Fig.1, producing pressure losses in the separated region and causing a blockage to the unseparated air flow in the remainder of the flow passage.

By altering the geometry of the downstream seating ledge as in the first aspect of the invention, the downstream seating ledge instead experiences a gradual pressure reduction over the second end surface due to the decreasing cross sectional area of the rich passage, reducing the local pressure. The corner at the junction between the second end surface and the surface of the seating ledge directed towards the rich passage is less sharp, reducing the likelihood of a large blockage of the rich passage due to substantial flow separation at this point. The pressure at the valve rich surface in the locality of the valve edge is lowered, reducing the likelihood of gas seepage from the rich passage into the lean passage at the valve downstream edge.

The second end surface may be inclined at an angle of between 3 and 30 degrees and more preferably between 4 and 10 degrees relative to the downstream seating surface. The degree of inclination produces a substantially attached flow over the second end surface in order to achieve a gradual pressure rise over the second end surface.

The rich surface of the valve may lie flush with the rich surface of the partition wall upstream of the valve when the valve fully closes the aperture. Thus, there is no obstacle to the air flowing over the partition wall in the rich passage when it reaches the upstream edge of the valve, reducing the likelihood of flow separation and associated losses in this locality. The terms "rich surface" and



"lean surface" of the valve and partition are used to denote those surfaces directed towards the rich and lean passages, respectively.

According to a second aspect of the invention, there is provided a carburettor according to the pre-characterising portion of the first embodiment, characterised in that at least a portion of the upstream seating ledge is of progressively decreasing thickness in the inward direction of the aperture.

This feature may reduce the likelihood of flow separation over the upstream seating ledge. The sharp corner of the downstream seating ledge of WO99/58829 causes air flowing over the seating ledge to separate at the corner, locally reducing the pressure there. The separation can also cause a partial blockage to the unseparated flow in the remainder of the passage. By altering the geometry according to the second aspect of the invention, the flow experiences a more gradual pressure rise due to the gradual expansion of the cross sectional area of the lean passage, locally increasing the pressure at the valve surface. The angle at the junction between the first end surface and the lean surface of the downstream seating ledge directed towards the lean passage is less sharp, reducing the likelihood of flow separation there. The pressure at the lean surface of the valve in the locality of the valve upstream edge is increased, reducing the likelihood of gas seepage from the rich passage into the lean passage at the valve upstream edge.

The first end surface may be inclined at an angle of between 3 and 30 degrees to the seating surface and more preferably between 4 and 10 degrees relative to the seating surface.

According to a third aspect of the invention, there is provided a carburettor according to the pre-characterising portion of the first embodiment,

characterised in that the valve is pivotally mounted upon a pivot rod for rotation between said first and second positions, the pivot rod being adapted such that it protrudes into the lean passage only. The result is that when the valve closes the aperture, the rich passage is free of protuberances other than the downstream seating ledge.

Removing the presence of the pivot rod in the rich passage removes a blockage to the flow over the surface of the valve facing towards the rich passage, and produces a greatly reduced likelihood of flow separation over the partition and the valve in the rich passage. This in turn results in the flow remaining attached as it approaches the downstream side of the valve, meaning that any method of flow control to be operated there is more likely to succeed than if a separated flow approached the downstream side of the valve.

According to a fourth aspect of the invention there is provided a carburettor according to the pre-characterising portion of the first embodiment, characterised in that a part annular wedge is disposed on the surface of the valve that is directed towards the rich passage when the aperture is closed, the wedge comprising an inclined face and a downstream face opposed to the second end surface, the thickness of the wedge increasing from a minimum at the valve surface to a maximum at the wedge downstream face, and arranged such that when the aperture is fully closed, a gap is formed between the downstream face of the wedge and the second end surface of the downstream seating ledge.

The presence of the wedge on the valve surface upstream of the downstream seating ledge produces a gradually inclined surface ahead of the seating ledge. As with the first aspect of the invention, the air approaching the seating ledge does not experience a sharp pressure rise ahead of the second end surface, but

instead experiences a gradual pressure reduction over the inclined face due to the decreasing cross sectional area of the rich passage, reducing the local air pressure. The sharp corner defining the junction of the inclined face and the downstream face combined with the small gap between the wedge and the downstream seating ledge causes flow to separate at the corner and reattach again to the seating ledge. A reduced pressure is created in the gap between the wedge and the downstream seating ledge and therefore the pressure in the locality of the valve downstream edge is lowered, reducing the likelihood of gas seepage from the rich passage into the lean passage at the valve downstream edge.

The maximum thickness of the wedge may be substantially the same as the thickness of the seating ledge. This increases the likelihood of the flow reattaching to the leading edge of the seating ledge after it has separated from the wedge.

The gap may be significantly smaller than the maximum thickness of the wedge. This also increases the likelihood of the flow reattaching to the leading edge of the seating ledge after it has separated from the wedge. If the gap is too large, then the separated flow may not reattach to the downstream seating ledge and may create a large separation bubble downstream of the wedge, causing a considerable blockage to the flow in the remainder of the passage.

According to a fifth aspect of the invention, there is provided a carburettor according to the pre-characterising portion of the first embodiment, characterised in that a part-annular wedge member is disposed on the surface of the valve that is directed towards the lean passage when the aperture is closed, the wedge comprising an upstream face opposed to the first end surface and an inclined face, the thickness of the wedge decreasing from a maximum at its

upstream face to a minimum at the valve surface, and arranged such that when the aperture is fully closed, a gap is formed between the upstream face of the wedge and the first end surface of the downstream seating ledge.

5 The presence of the wedge downstream of the upstream seating ledge produces a gradually inclined surface downstream of the seating ledge. Flow over the seating ledge experiences a gradual pressure increase over the inclined face due to the increasing cross sectional area of the lean passage, reducing the likelihood of separation and increasing the local pressure in comparison to the  
10 pressure experienced without the wedge.

The maximum thickness of the wedge may be substantially the same as the thickness of the seating ledge. This increases the likelihood of the flow reattaching to the leading edge of the seating ledge after it has separated from  
15 the wedge.

The gap may be significantly smaller than the thickness of the downstream face of the wedge member. This also increases the likelihood of the flow reattaching to the leading edge of the seating ledge after it has separated from  
20 the wedge. If the gap is too large, than the separated flow may not reattach and may create a large separation bubble downstream of the wedge, causing a considerable blockage to the flow in the remainder of the passage.

The present invention will now be explained in more detail by the following  
25 non-limiting description of preferred embodiments and with reference to the accompanying drawings, in which:-

Fig. 1 is a schematic view of a prior art carburettor with the throttle valve fully opened;

Fig. 2 is a schematic view of a part of a carburettor according to a first aspect of the present invention;

Fig. 3 is a schematic view of a part of a carburettor according to a second aspect of the present invention;

5 Fig. 4 is a schematic view of a part of a carburettor according to a third aspect of the present invention;

Fig. 5 is a schematic view of a part of a carburettor according to a fifth aspect of the present invention;

10 Fig. 6 is a schematic view of a part of a carburettor according to a sixth aspect of the present invention.

A first embodiment of a carburettor is shown schematically in Fig. 2. The carburettor part has been adapted from the carburettor of Fig. 1, and identical parts have been numbered with the same reference number with the prefix '1'.  
15 Thus, Fig. 2 shows a partition wall 130 separating a rich passage 160 from a lean passage 150. An aperture 140 is formed within the partition wall 130, in which is received a butterfly valve 120 for selectively opening and closing the aperture 140 and simultaneously closing and opening the flow duct through the carburettor. The valve 120 comprises a substantially flat disc, shown  
20 schematically in profile in Fig. 2. The valve has a lean surface 123 that is directed towards the lean passage 150 and a rich surface 129 that is directed towards the rich passage 160. The valve 120 has an upstream side 121 and a downstream side 122, the demarcation being the pivot rod 143 upon which the valve 120 is mounted. The pivot rod 143 comprises a circular rod that extends  
25 through the valve centreline in a direction perpendicular to the flow direction of the carburettor, as defined by the partition wall 130. The diameter of the pivot rod 143 is larger than the thickness of the valve disc 120, and so the pivot rod 143 protrudes from the valve 120 forming generally semi-cylindrical protuberances into the lean passage 150 and the rich passage 160. When the

valve 120 is closed or partially closed, the rich passage 160 and lean passage 150 are blocked to the oncoming flow, as the valve 120 throttles the flow through the carburettor. When the valve 120 is open, the rich passage 160 and lean passage 150 are unblocked to the oncoming flow. The arrows to the left of  
5 Fig. 2 designate the flow direction.

The aperture 140 is defined by seating ledges 148 and 149. The upstream half of the aperture 140 is defined by the upstream seating ledge 148, which  
10 comprises a semi-annular ledge or step of approximately half the thickness of the partition wall 130 integral with the partition wall 130. The upstream seating ledge 148 comprises a seating surface 151 directed towards the rich passage 160 and a first end surface 153 substantially orthogonal to the seating surface 151. The seating ledge 148 has a downstream face 155 that is curved with the  
15 same curvature as the valve 120 such that when the valve 120 fully closes the aperture 140, it is seated with a close fit against the downstream face 155 and seating surface 151. The fit between the valve 120 and the seating ledge 148 is very close in order to avoid seepage of gases around the valve edge from the rich passage 160 into the lean passage 150.

20 The downstream half of the aperture 140 is defined by the downstream seating ledge 149, which also comprises a semi-annular ledge of approximately half the thickness of the partition wall 130. The seating ledge 149 is almost identical to the upstream seating ledge 148 and when the valve 120 fully closes the aperture 140, it is seated against seating surface 157, which is directed towards  
25 the lean passage 150, and an upstream face 159 that is curved with the same curvature as the valve 120. However, whereas the first end surface 153 of the upstream seating ledge 148 is substantially orthogonal to the seating surface 151, the corresponding second end surface 161 of the downstream seating ledge 149 is inclined such that the thickness of the downstream seating ledge

149 increases from a minimum at the aperture 140 to a maximum at the rich surface 163 of the partition wall 130.

5 The angle of inclination of the second end surface 161 relative to the seating surface 157 is approximately seven degrees; the angle is exaggerated in Fig. 2 for clarity. It is usually necessary that the portion of the second end surface 161 closest to the seating surface 157 is not inclined as it can be difficult to manufacture the component with a sharp edge. The edge must also be able to withstand the valve 120 abutting it when the aperture 140 is closed.

10 In use when the valve 120 fully closes the aperture 140, the flow in the rich passage 160 close to the rich surface 123 of the valve 120 flows over the inclined second end surface 161 without separating from it. The pressure over the second end surface 161 gradually decreases, reducing the local pressure in the vicinity of the valve edge 120. This reduced pressure at the rich surface 129  
15 of the valve 120 reduces the likelihood of gas seepage from the rich passage 160 through to the lean passage 150.

20 Fig. 3 shows a second embodiment of the invention. The geometry of the valve 220 and partition wall 230 is almost identical to that of the embodiment of Fig. 2. In this embodiment however, the second end surface 261 of the downstream seating ledge 249 remains orthogonal to the seating surface 257 and the first end surface 253 of the upstream seating ledge 248 is inclined such that the thickness of the seating ledge 248 increases from a minimum  
25 substantially at the seating surface 251 to a maximum at the surface 265 of the seating ledge 248 that is directed towards the lean passage 250.

The angle of inclination of the first end surface 253 relative to the seating surface 251 is approximately seven degrees; the angle is exaggerated in Fig. 3

for clarity. The angle is small enough that flow over the partition wall 230 in the lean passage 250 does not separate from the inclined first end surface 253. In use when the valve 220 fully closes the aperture 140, the inclined face 253 avoids the separation of the flow thereover and the associated low pressure region that would result from separation, and instead creates a gradual pressure rise over the face 253. This reduces the likelihood of gas seepage from the rich passage 260 into the lean passage 250.

The embodiment shown in Fig. 4 is geometrically almost identical to the carburettor of Fig. 1 (from WO99/58829) with the exception that the lower protuberance of the pivot rod 343 is removed. The pivot rod 343 is in effect flattened or of semi-cylindrical shape so that it lies flush with the rich surface 329 of the valve 320. The pivot rod 343 is securely affixed to the valve 320 using glue or other appropriate fastening means that will not disturb the rich surface 323.

In use when the valve 320 fully closes the aperture 340, the flow over the upstream portion of the partition wall 330 will continue to flow attached to the rich surface 329 of the valve 320. Thus, the high pressure associated with stagnation of the flow at the upstream side of the pivot rod 343 lower hemisphere is avoided, as is the blockage due to separated flow at and immediately downstream of the pivot rod 343.

The embodiment of Fig. 5 is again very similar to the prior art carburettor shown in Fig.1, but with the addition of a part-annular wedge section member 470 to the rich surface 429 of the valve 420. The wedge 470 comprises an upstream inclined or smoothly curved face 472 and a downstream face 474. The wedge 470 is affixed to the rich surface 423 of the valve 420 such that the downstream face 474 thereof is parallel to and facing the second end surface



461 of the downstream seating ledge 449, forming a small gap therebetween. The height of the downstream face 474 is approximately equal to the height of the second end surface 461. The wedge 470 thus increases in thickness from a minimum at the valve rich surface 429 to a maximum at the downstream face 474. The inclination of the inclined face 472 is shallow enough to avoid substantial separation of the flow over the wedge 470.

In use when the valve 420 fully closes the aperture 440 and the gases flow over the inclined face 472, the pressure at the surface reduces. The flow separates from the sharp corner at the downstream end of the inclined face 472 and reattaches at the leading edge of the second end surface 461 of the downstream seating ledge 449, creating a reduced pressure in the small gap between the wedge 470 and the seating ledge 449. The air pressure in the locality of the valve edge 420 in the rich passage 460 is reduced, lowering the chance of gas escaping from the rich passage 460 into the lean passage 450.

The embodiment of Fig. 6 is geometrically identical to the prior art carburettor shown in Fig. 1, but with the addition of a part-annular wedge section member 570 to the lean surface 523 of the valve 520. The wedge 570 comprises a downstream inclined or smoothly curved face 572 and a front face 574. The wedge is affixed to the lean surface 523 of the valve 520 such that the front face 574 thereof is parallel to and facing the end surface 553 of the upstream seating ledge 548, forming a small gap therebetween. The thickness of the front face 574 is approximately equal to the thickness of the end surface 553. The wedge 570 thus decreases in thickness from a maximum at the front face 574 to a minimum at the valve lean surface 523. The inclination of the inclined face 572 is shallow enough to avoid substantial separation of the flow over the wedge 570.

In use when the valve 520 fully closes the aperture 540, the flow over the wedge 570 separates from the sharp corner at the end surface 553 and will reattach at the front face 574/inclined surface 572 junction, creating a reduced pressure in the small gap between the wedge 570 and the seating ledge 548.

5 The pressure increases gradually over the inclined surface 572 as the cross sectional area of the lean passage increases.

It will be evident to the skilled man that two or more of the above embodiments may be utilised in conjunction with one another on the same carburettor where  
10 this is appropriate, to minimise the chance of gas seepage from the rich passage into the lean passage when the valve 120 fully closes the aperture 140.

It is noted that for each of the embodiments described herein, the relevant geometrical feature of the invention need not extend around the whole  
15 upstream half or the whole downstream half of the seating ledge or valve to which it is applied. Each feature may extend only partially around the upstream half or downstream half of the seating ledge/valve as appropriate.

20

25

1/2

Fig 1

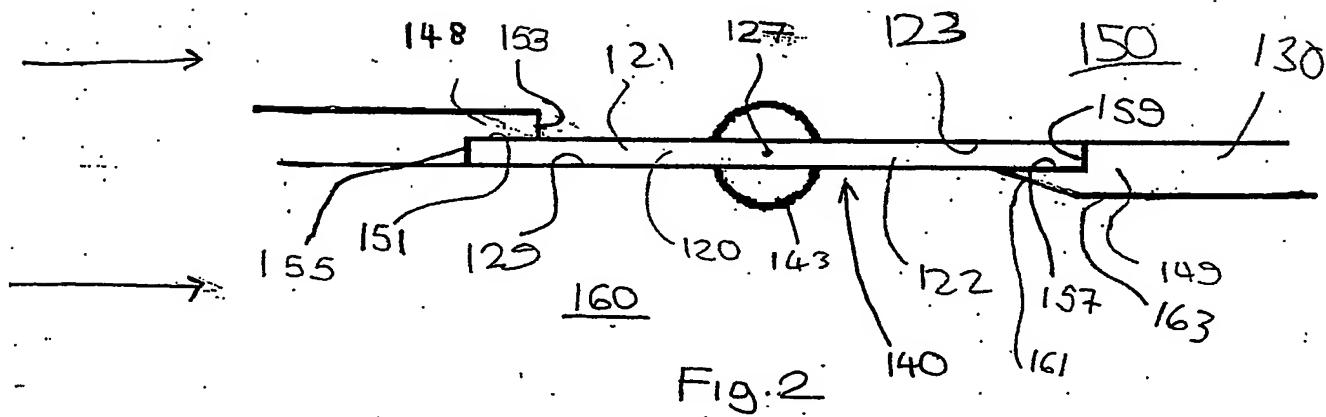
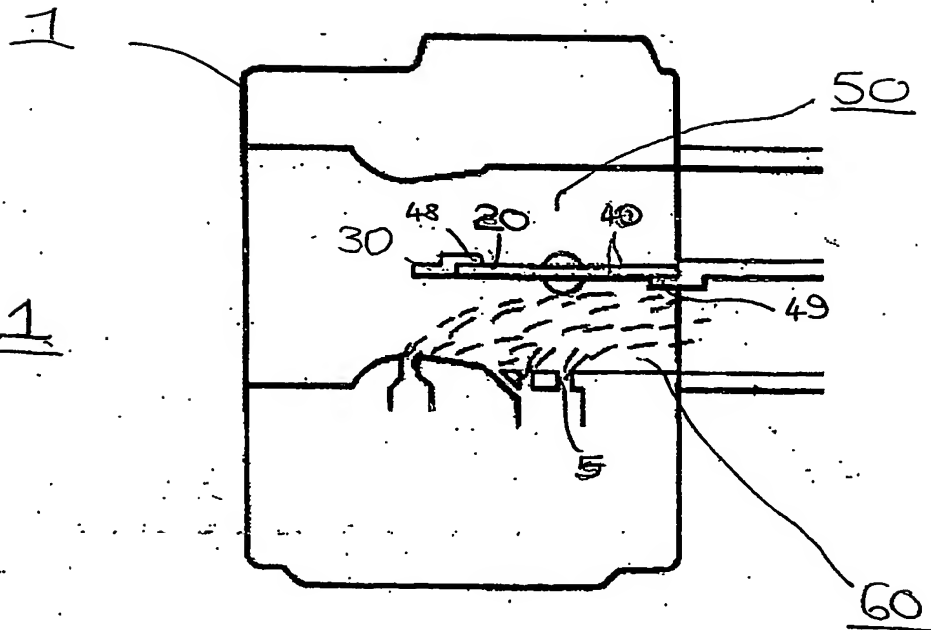


Fig. 2

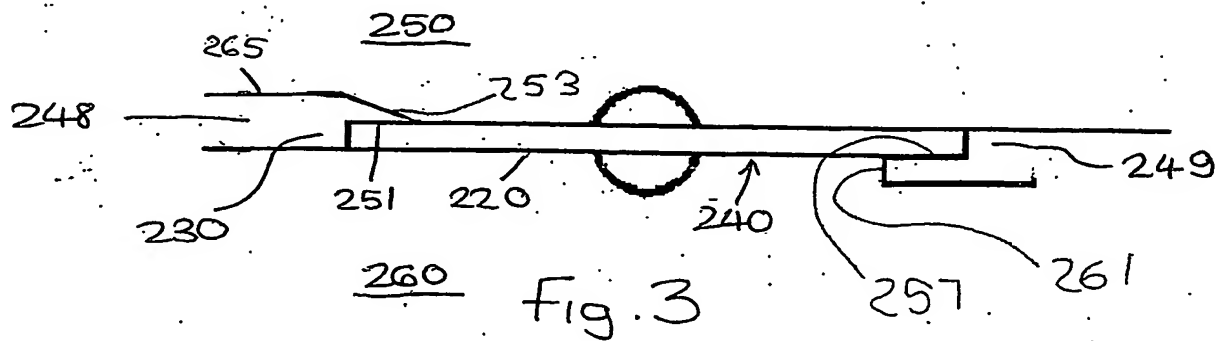


Fig. 3

2/2

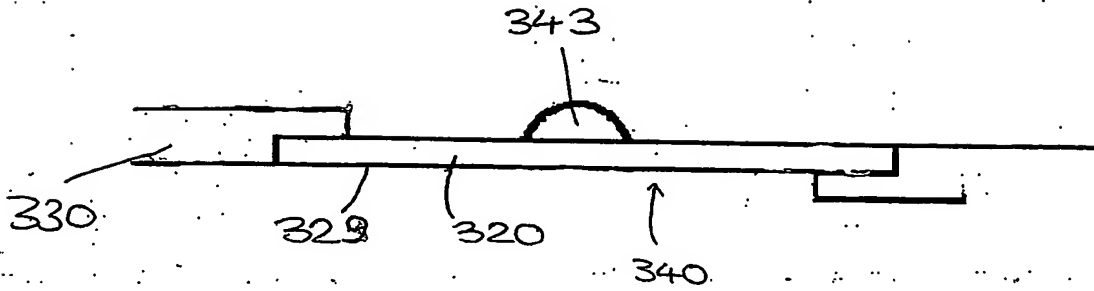


Fig. 4

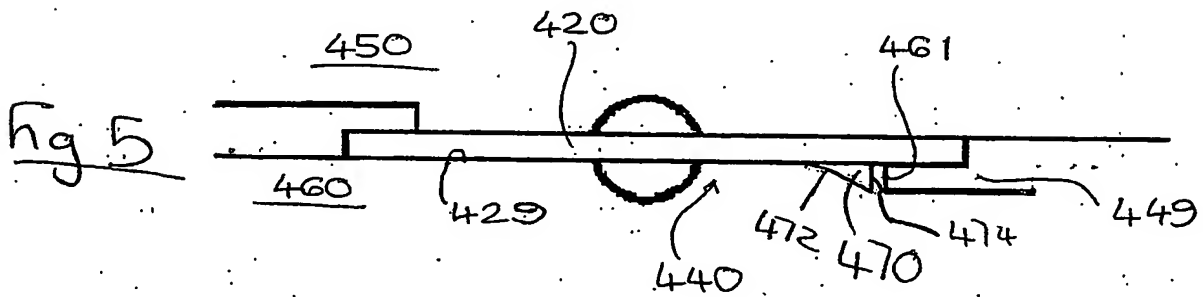


Fig. 5

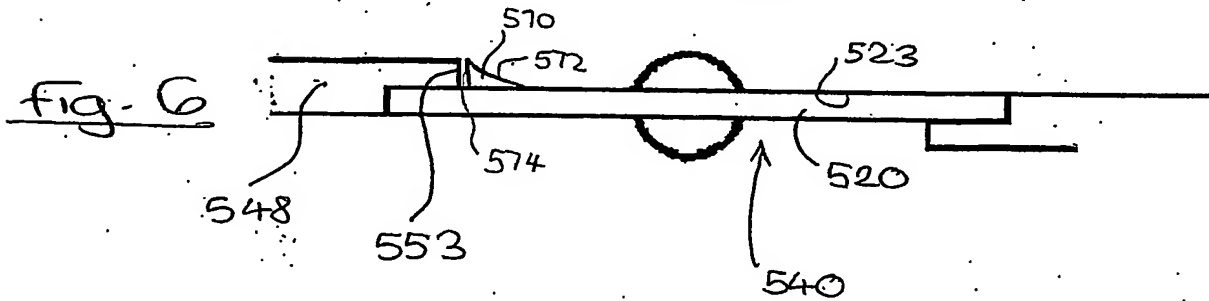


Fig. 6

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**